


LC SERIES

15W AC/DC CONVERTERS Single Output & Dual Outputs



H20×W40×L60 (mm)


Features

- Input-Output Isolation
- Completely Molding Device
- High Efficiency 75~85%
- High Reliability
- 6 Sided Metal Shielding
- Operating Ambient Temperature -30°C~+71°C
- VCCI Class B
- Conformity to RoHS Directive
- Please add external Fuse connected to input for protection
- 入出力間絶縁
- 完全モールド製品
- 高効率 75~85%
- 高信頼性
- 6面メタルシールド
- 動作周囲温度 -30°C~+71°C
- VCCI クラスB 準拠
- RoHS指令対応
- 保護のため入力にヒューズを 外付けしてください

General Characteristics

- Input Voltage, Range (at Ta:25°C, Full Load, Nominal Vin) AC100V, 200V (See Table 1)
- Input Frequency 47~440Hz
- Output Voltage, Current See Table 1
- Output Voltage Accuracy ±2% (2.5V, 3.3V, 5V Vout : ±3%)
- Efficiency See Table 1
- Line Regulation 0.5% max. (at Vin Range)
- Load Regulation Single : ±0.5% max. (0~100% Load)
Dual : ±2% max. ±3% max. (±5V Vout only) (10~100% Load)
- Output Ripple (0.2% Vout + 40mV) p-p max.
- Output Noise (0.5% Vout + 50mV) p-p max.
- Short Circuit Protection Built-in, Auto-restart (See Fig 2)
- Input Rush Current 20A max.
- Temperature Coefficient 0.02%/°C max.
- Operating Ambient Temp. -30°C~+71°C (See Fig 1)
- Max. Case Temperature +85°C
- Storage Temperature -40°C~+85°C
- Isolation Voltage AC1500V one minute (Input-Output-Case)
- Isolation Impedance 100MΩ min. (at DC1000V) (Input-Output-Case)
- Weight 120g max.
- Humidity 20~95% RH
- Shock 490m/s² (11msec 3directions)
- Vibration 10~55Hz 98m/s² (30minutes 3directions)
- Surface Structure 6 Sided Metal Case
- Soldering Conditions Soldering DIP 260°C, for 15 seconds max.
Soldering iron 360°C, for 5 seconds max.
- MTBF Single : 140,000H
Dual : 120,000H (Ta:25°C, 80% Load, Nominal Vin)
- Warranty 5 years


Pin Outs & Dimensions (±0.5mm)

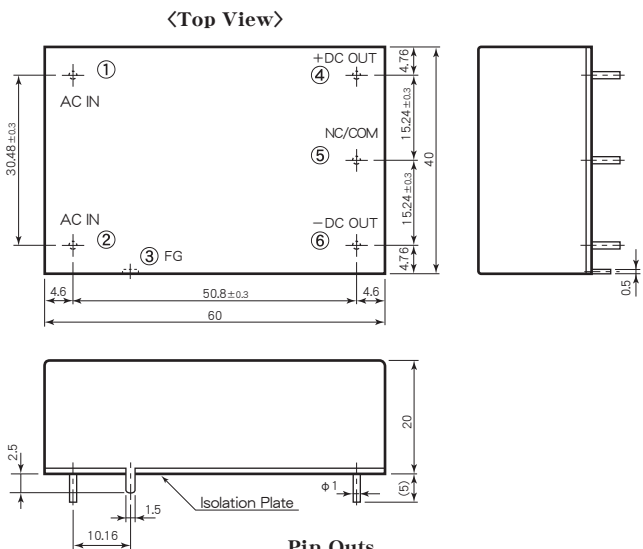

Pin Outs

Single Output		Dual Outputs	
①	AC in	①	AC in
②	AC in	②	AC in
③	Frame Ground	③	Frame Ground
④	+Vdc out	④	+Vdc out
⑤	No Connection	⑤	Common
⑥	-Vdc out	⑥	-Vdc out

Hole Configurations on PCB (Top View)

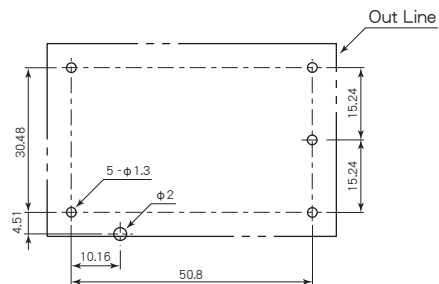

Selection Guide


Table 1

Model Number	Input Volt. (Range) (V. AC)	Output Voltage (V. DC)	Output Current (A)	Efficiency (Typical) (%)
LC100-2.5S 4A	100 (85~132)	2.5	4	79
LC100-3.3S 3.5A		3.3	3.5	81
LC100-5S 3A		5	3	83
LC100-12S 1.3A		12	1.3	85
LC100-15S 1A		15	1	85
LC100-24S0.65A		24	0.65	85
LC100-5D 1.5A		±5	±1.5	75
LC100-12D0.65A		±12	±0.65	80
LC100-15D0.52A		±15	±0.52	81
LC200-2.5S 4A		200 (175~264)	2.5	4
LC200-3.3S 3.5A	3.3		3.5	81
LC200-5S 3A	5		3	83
LC200-12S 1.3A	12		1.3	85
LC200-15S 1A	15		1	85
LC200-24S0.65A	24		0.65	85
LC200-5D 1.5A	±5		±1.5	75
LC200-12D0.65A	±12		±0.65	80
LC200-15D0.52A	±15		±0.52	81


LC SERIES DATA SHEET

Block Diagram

Single Output

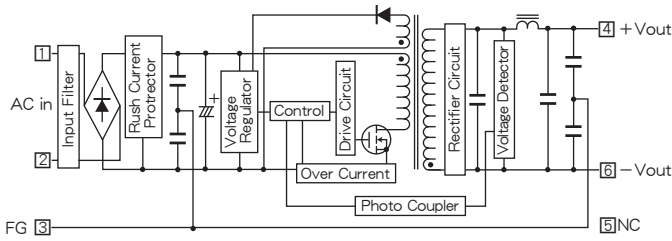

Dual Outputs

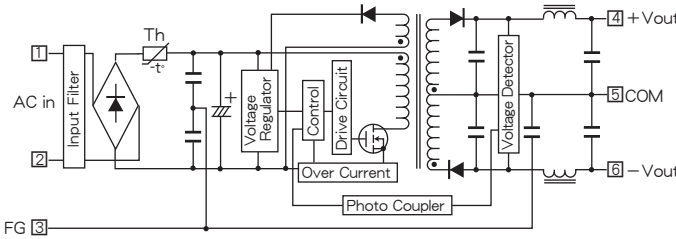

Characteristic Curves

Fig 1 Derating Curve

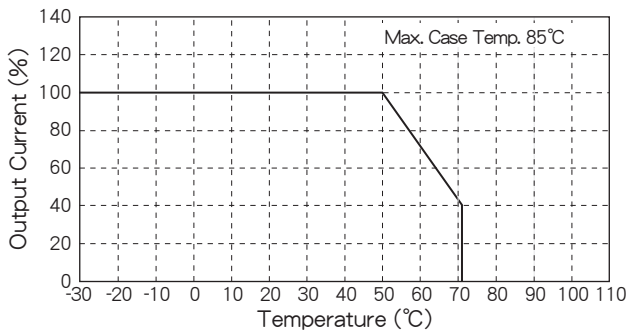


Fig 2 Short Circuit Operating Area

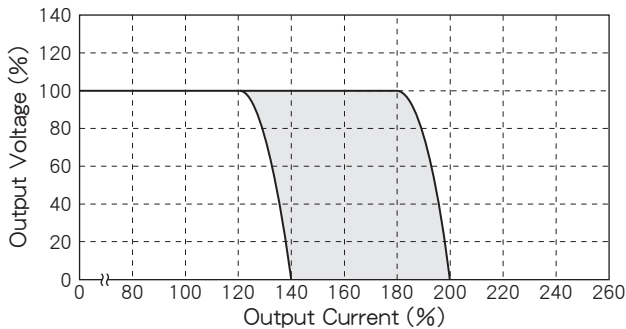


Fig 3 Temperature Characteristic on Case Surface

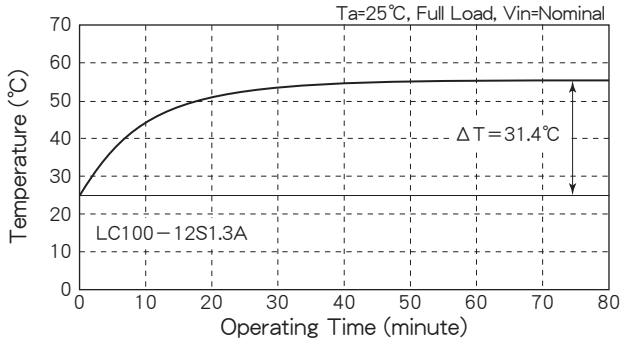


Fig 4 Efficiency vs. Output Current

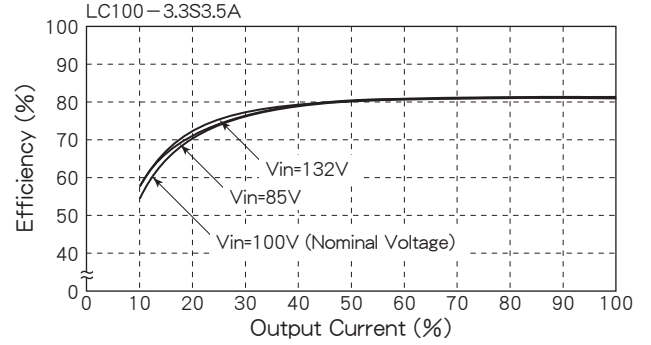


Fig 5 Efficiency vs. Output Current

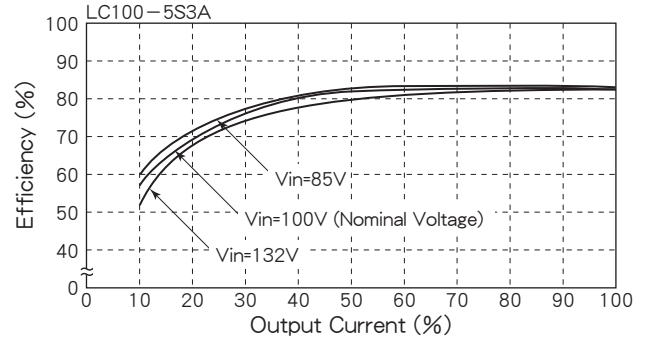


Fig 6 Efficiency vs. Output Current

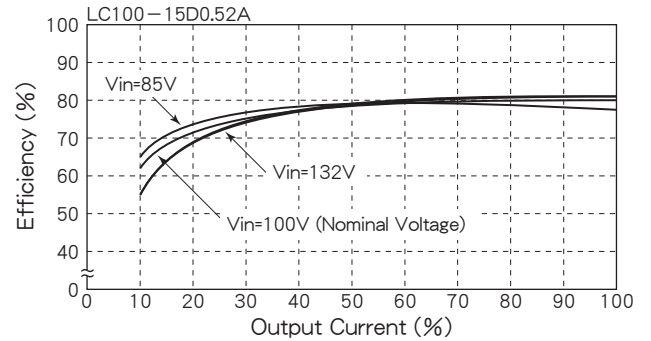


Fig 7 Efficiency vs. Output Current

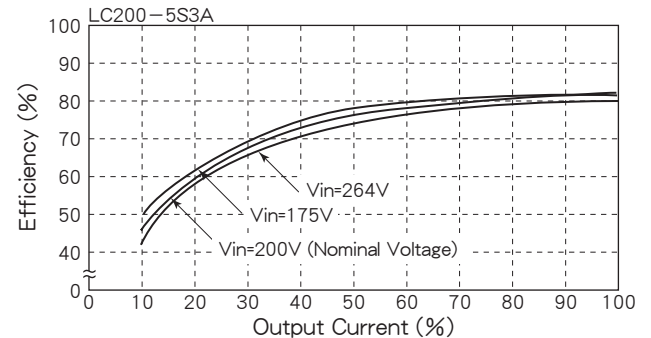


Fig 8 Efficiency vs. Output Current

