

SQV SERIES

10~12W DC/DC CONVERTERS Single Output



H8.5×W30×L47 (mm)


Features

- High Efficiency 81~87%
 - 8.5mm in Height
 - Compact, Light Weight
 - Built-in Input Filter
 - Wide Input Voltage Range
 - Input-Output Isolation
 - Low No Load Current
 - 5 Sided Metal Shielding
 - High Reliability
 - Operating Ambient Temperature -40°C~+85°C
 - Max. Case Temperature +100°C
 - Conformity to RoHS2 Directive
 - Not built-in aluminum and tantalum electrolytic capacitor
- 高効率 81~87%
 - 高さ8.5mm
 - 小形、軽量
 - 入力フィルタ内蔵
 - 広範囲な入力電圧
 - 入出力間絶縁
 - 無負荷電流が少ない
 - 5面メタルシールド
 - 高信頼性
 - 動作周囲温度 -40°C~+85°C
 - 最大ケース温度 +100°C
 - RoHS2指令対応
 - アルミ電解コンデンサ及びタンタルコンデンサ不使用


General Characteristics

- Input Voltage, Range (at Ta : 25°C, Full Load, Nominal Vin) DC5, 12, 24, 48V (See Table 1)
- Output Voltage, Current See Table 1
- Output Voltage Accuracy ±2% (12, 15, 24, 28V Vout)
±3% (3.3, 5, 6V Vout)
- Efficiency See Table 1
- Line Regulation 0.3% max. (at Vin Range)
- Load Regulation ±0.5% max. (0~100% Load)
- Reflected Input Ripple, Noise (2% Vin)Vp-p max.
- Output Ripple 20mVp-p max.
- Output Noise 80mVp-p max. (0~20MHz)
150mVp-p max. (0~100MHz)
- Short Circuit Protection Built-in, Auto-restart (See Fig. 2)
- Temperature Coefficient 0.02%/°C max.
- Operating Ambient Temp. -40°C~+85°C (See Fig. 1)
-30°C~+85°C (5V Vin only)
- Max. Case Temperature +100°C
- Storage Temperature -40°C~+100°C
- Isolation Voltage AC500V one minute
(Input-Output-Case)
- Isolation Impedance 100MΩ min. (at DC1000V)
(Input-Output-Case)
- Weight 30g max.
- Humidity 20~95% RH
- Shock 490m/s² (11msec 3directions)
- Vibration 10~55Hz 98m/s²
(30minutes 3directions)
- Surface Structure 5 Sided Steel Case
- Soldering Conditions Soldering DIP 260°C, for 15 seconds max.
Soldering iron 360°C, for 5 seconds max.
- MTBF 1,000,000H
(Ta : 25°C, 80% Load, Nominal Vin)
- Warranty 5 years

Pin Outs & Dimensions (±0.5mm)

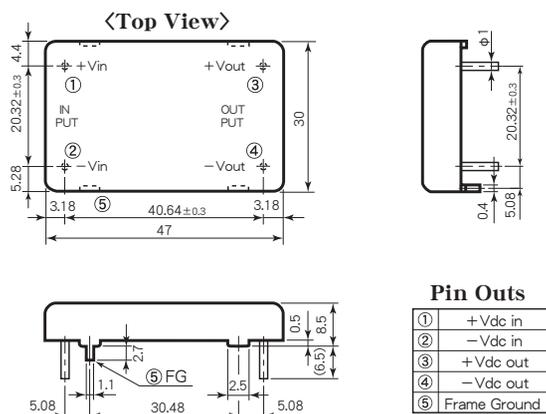

Hole Configurations on PCB (Top View)

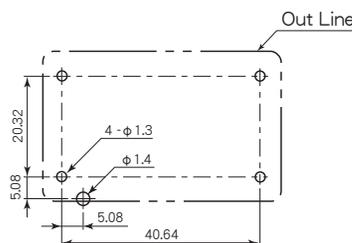

Selection Guide


Table 1

Model Number	Input Volt. (Range) (V. DC)	Output Voltage (V. DC)	Output Current (mA)	Efficiency (Typical) (%)
SQV 5 - 3.3 S 3000	5 (4.5~9)	3.3	3000	81
SQV 5 - 5 S 2000		5	2000	82
SQV 5 - 6 S 1600		6	1600	82
SQV 5 - 12 S 800		12	800	85
SQV 5 - 15 S 640		15	640	83
SQV 5 - 24 S 400		24	400	83
SQV 5 - 28 S 350		28	350	83
SQV 12 - 3.3 S 3000	12 (8~18)	3.3	3000	83
SQV 12 - 5 S 2200		5	2200	85
SQV 12 - 6 S 2000		6	2000	85
SQV 12 - 12 S 1000		12	1000	87
SQV 12 - 15 S 800		15	800	87
SQV 12 - 24 S 500		24	500	87
SQV 12 - 28 S 400		28	400	87
SQV 24 - 3.3 S 3000	24 (16~36)	3.3	3000	83
SQV 24 - 5 S 2200		5	2200	85
SQV 24 - 6 S 2000		6	2000	85
SQV 24 - 12 S 1000		12	1000	87
SQV 24 - 15 S 800		15	800	87
SQV 24 - 24 S 500		24	500	87
SQV 24 - 28 S 400		28	400	87
SQV 48 - 3.3 S 3000	48 (32~72)	3.3	3000	83
SQV 48 - 5 S 2200		5	2200	85
SQV 48 - 6 S 2000		6	2000	85
SQV 48 - 12 S 1000		12	1000	87
SQV 48 - 15 S 800		15	800	87
SQV 48 - 24 S 500		24	500	87
SQV 48 - 28 S 400		28	400	87

※ 上記仕様以外にも対応可能ですので お問い合わせ下さい。
Please consult with us about other specification.

SQV SERIES DATA SHEET

Block Diagram

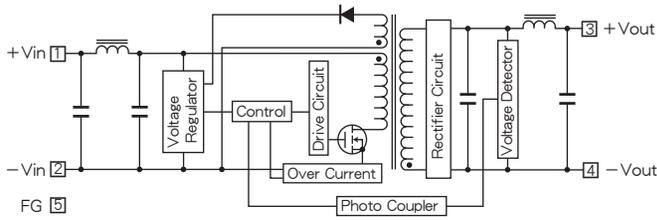

Characteristic Curves

Fig. 1 Derating Curve

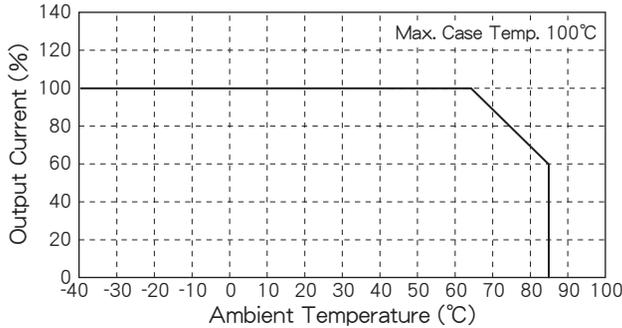


Fig. 2 Short Circuit Operating Area

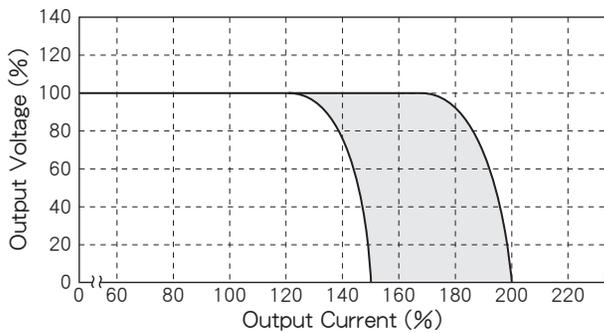


Fig. 3 Temperature Characteristic on Case Surface

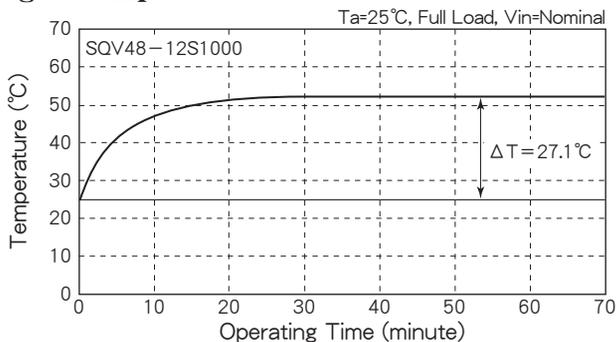


Fig. 4 Efficiency vs. Output Current

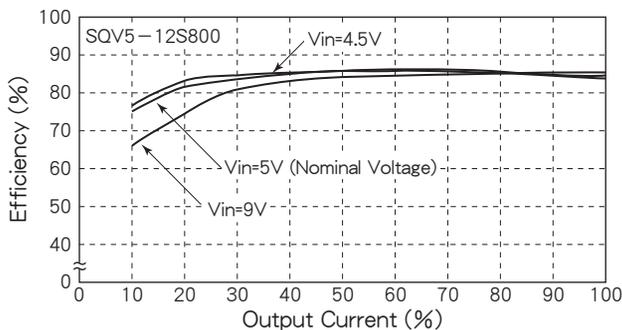


Fig. 5 Efficiency vs. Output Current

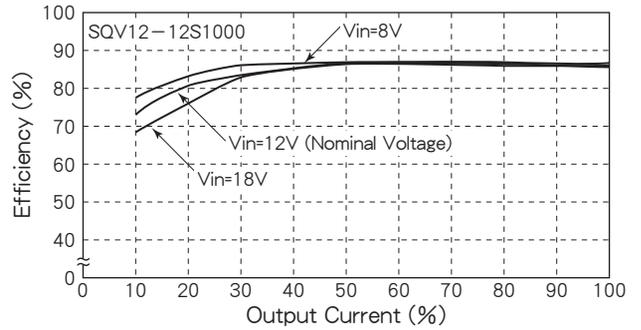


Fig. 6 Efficiency vs. Output Current

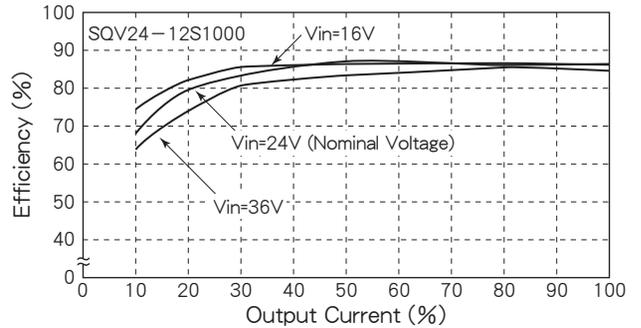


Fig. 7 Efficiency vs. Output Current

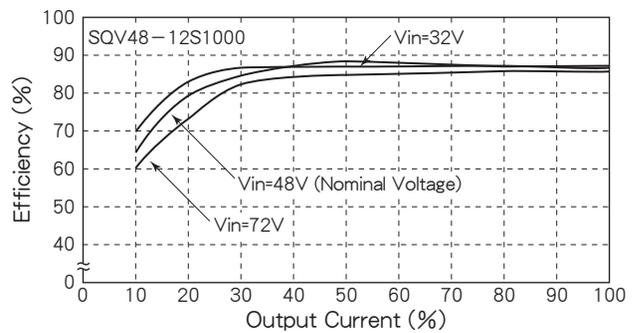


Fig. 8 Efficiency vs. Output Current

