

# SSK SERIES

## 2~3W DC/DC CONVERTERS Single Output & Dual Outputs



H8.5×W21×L33 (mm)


### Features

- Low Profile 8.5mm
- Built-in Input Filter
- Input-Output Isolation
- High Efficiency 70~81%
- Wide Input Voltage Range
- High Reliability
- Low No Load Current
- 5 Sided Metal Shielding
- Operating Ambient Temp. -40°C~+85°C
- Max. Case Temperature +100°C
- Conformity to RoHS2 Directive
- Not built-in aluminum and tantalum electrolytic capacitor
- 薄型 8.5mm
- 入力フィルタ内蔵
- 入出力間絶縁
- 高効率 70~81%
- 広範囲な入力電圧
- 高信頼性
- 無負荷電流が少ない
- 5面メタルシールド
- 動作周囲温度 -40°C~+85°C
- 最大ケース温度 +100°C
- RoHS2指令対応
- アルミ電解コンデンサ及びタンタルコンデンサ不使用


### General Characteristics

- Input Voltage, Range (at Ta : 25°C, Full Load, Nominal Vin) DC5, 12, 24, 48V (See Table 1)
- Output Voltage, Current See Table 1
- Output Voltage Accuracy ±3%
- Efficiency See Table 1
- Line Regulation 0.3% max. (at Vin Range)
- Load Regulation Single : ±0.5% max. (0~100% Load)  
Dual : ±3% max. (10~100% Load)  
(3% Vin)Vp-p max.
- Reflected Input Ripple and Noise
- Output Ripple 20mVp-p max.
- Output Noise 100mVp-p max.
- Short Circuit Protection Built-in, Auto-restart (See Fig. 2)
- Temperature Coefficient 0.02%/°C max.
- Operating Ambient Temp. -40°C~+85°C (See Fig. 1)  
-30°C~+85°C (5V Vin only)  
-40°C~+100°C
- Storage Temperature
- Isolation Voltage AC500V one minute  
(Input-Output-Case)
- Isolation Impedance 100MΩ min. (at DC1000V)  
(Input-Output-Case)
- Weight 15g max.
- Humidity 20~95% RH
- Shock 490m/s<sup>2</sup> (11msec 3directions)
- Vibration 10~55Hz 98m/s<sup>2</sup>  
(30minutes 3directions)
- Surface Structure 5 Sided Steel Case
- Soldering Conditions Soldering DIP 260°C, for 15 seconds max.  
Soldering iron 360°C, for 5 seconds max.
- MTBF Single : 720,000H  
Dual : 600,000H  
(Ta : 25°C, 80% Load, Nominal Vin)
- Warranty 5 years

### Pin Outs & Dimensions (±0.5mm)

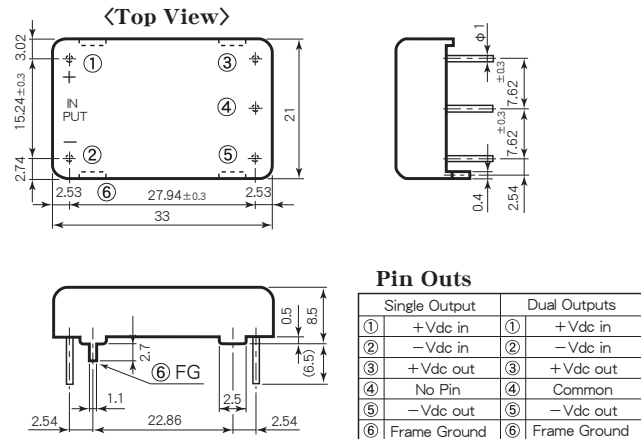

### Hole Configurations on PCB (Top View)

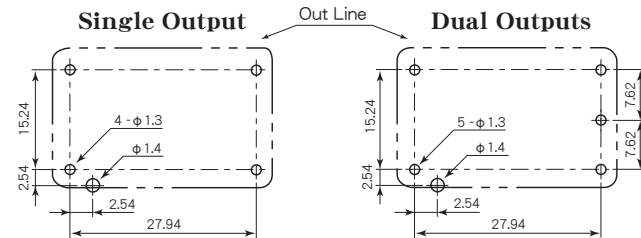

### Selection Guide

Table 1


Model Number	Input Volt. (Range) (V. DC)	Output Voltage (V. DC)	Output Current (mA)	Efficiency (Typical) (%)
SSK 5 - 5S400	5 (4.5~9)	5	400	70
SSK 5 - 6S350		6	350	70
SSK 5 - 12S200		12	200	74
SSK 5 - 15S160		15	160	72
SSK 5 - 24S100		24	100	72
SSK 5 - 5D200		±5	±200	74
SSK 5 - 12D100		±12	±100	74
SSK 5 - 15D80		±15	±80	74
SSK 12 - 5S500	12 (8~18)	5	500	78
SSK 12 - 6S450		6	450	77
SSK 12 - 12S250		12	250	80
SSK 12 - 15S200		15	200	78
SSK 12 - 24S125		24	125	78
SSK 12 - 5D250		±5	±250	81
SSK 12 - 12D125		±12	±125	81
SSK 12 - 15D100		±15	±100	78
SSK 24 - 5S500	24 (16~36)	5	500	76
SSK 24 - 6S450		6	450	76
SSK 24 - 12S250		12	250	80
SSK 24 - 15S200		15	200	81
SSK 24 - 24S125		24	125	80
SSK 24 - 5D250		±5	±250	80
SSK 24 - 12D125		±12	±125	80
SSK 24 - 15D100		±15	±100	80
SSK 48 - 5S500	48 (32~72)	5	500	75
SSK 48 - 6S450		6	450	75
SSK 48 - 12S250		12	250	80
SSK 48 - 15S200		15	200	80
SSK 48 - 24S125		24	125	80
SSK 48 - 5D250		±5	±250	75
SSK 48 - 12D125		±12	±125	80
SSK 48 - 15D100		±15	±100	81

※ 上記仕様以外にも対応可能ですのでお問い合わせ下さい。  
Please consult with us about other specification.


# SSK SERIES DATA SHEET

## Block Diagram

### Single Output

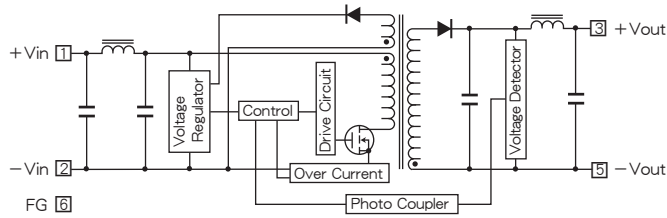

### Dual Outputs

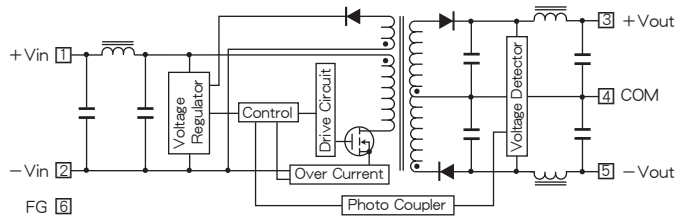

## Characteristic Curves

Fig. 1 Derating Curve

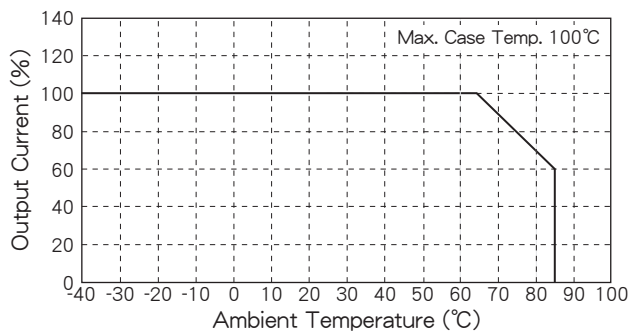


Fig. 2 Short Circuit Operating Area

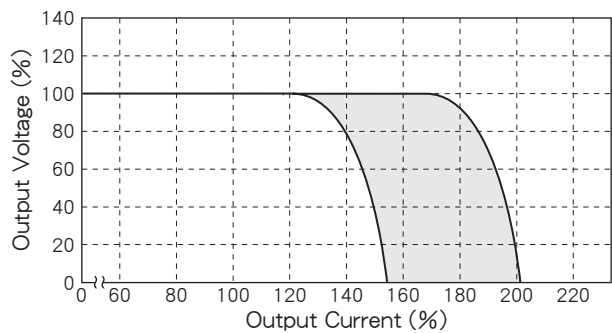


Fig. 3 Temperature Characteristic on Case Surface

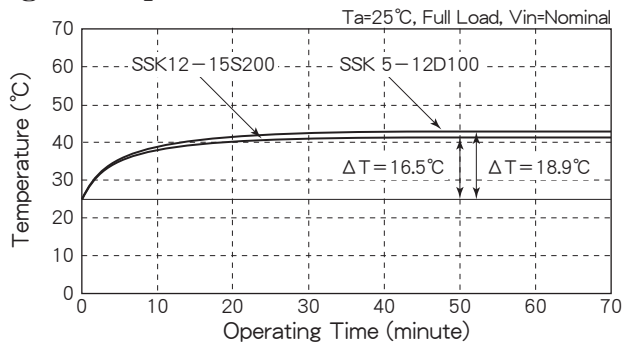


Fig. 4 No Load Current vs. Input Voltage

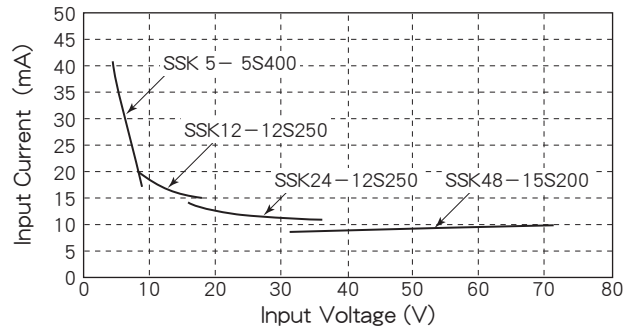


Fig. 5 Efficiency vs. Output Current (Single Output)

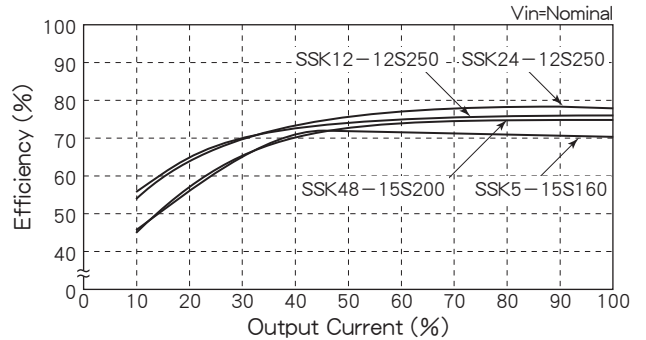


Fig. 6 Efficiency vs. Output Current (Dual Outputs)

